
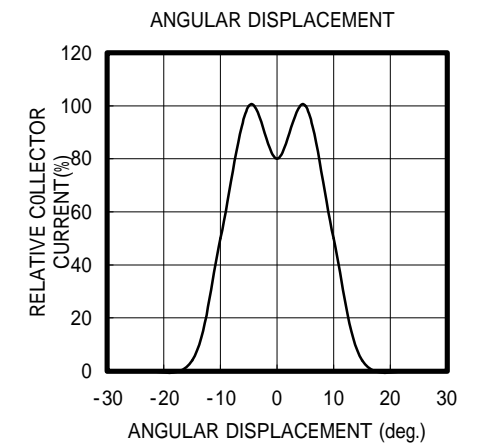
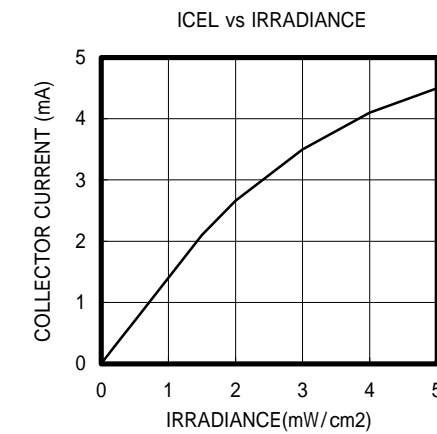


- FEATURES**
- High Reliability
 - Narrow Angular Response
 - Supper Compact (ϕ 2.0)
- APPLICATIONS**
- Optical Switches
 - Edge Sensing
 - Fiber Optical Communications
 - Smoke Detectors

2. ELECTRICAL & OPTICAL CHARACTERISTICS (Ta=25)

ITEM	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Collector Emitter Current	I _{cel}	V _{ce} =20V, E _e =0.5mw/cm ²		0.7		mA
Collector Dark Current	I _{ceo}	V _{ce} =20V, E _e =0mw/cm ²			100	nA
C-E Saturation Voltage	V _{CE(sat)}	I _c =0.2mA, E _e =5mw/cm ²		0.2		V
Spectral sensitivity				400 ~ 1100		nm
Peak Sensitivity Wave Length	λ_p			880		nm
Switching time (Rise Time)	T _r	R _L =100 , V _{ce} =5V, I _c =0.5mA		7.0		μ S
Switching time (Fall Time)	T _f	R _L =100 , V _{ce} =5V, I _c =0.5mA		5.0		μ S
Angular Response				\pm 10		deg

Color Temperature=2870°K Standard Tungsten Lump

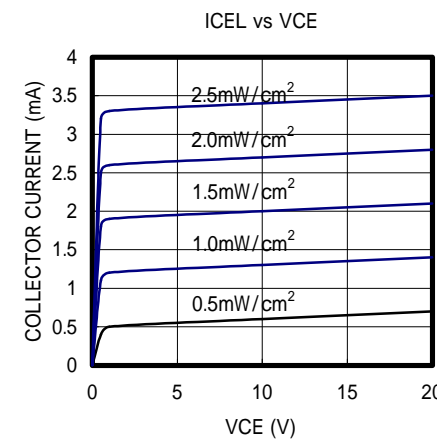

1. ABSOLUTE MAXIMUM RATINGS (Ta=25)

ITEM	SYMBOL	RATINGS	UNIT
Collector-Emitter Voltage	V _{ceo}	30	V
Emitter-Collector Voltage	V _{eco}	5	V
Collector Current	I _c	20	mA
Collector Power Dissipation	P _c	100	mW
Operating Temp.	T _{opr}	-25 TO 100	
Storage Temp.	T _{stg}	-30 TO 125	
Junction Temp.	T _j	125	
Lead Soldering Temp.*	T _{ls}	260	

*Time 5 Sec max, Position: Up to 3mm from the body

